



DATE

PROJECT NOTES

Dry Location



Wet Location



WARNING!


DO NOT CONNECT DIRECTLY TO LINE VOLTAGE POWER!

Read all warnings and installation instructions thoroughly.


Safety & Warnings

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Do not modify or disassemble this product beyond instructions or the warranty will be void.
4. Do not submerge, or install within 5 feet of a swimming pool.
5. All plastics are affected by the elements and may shift in color and other properties after product installation, particularly with direct exposure to sun, chlorinated water, and other chemicals.
6. Only install with a Listed Class 2 DC LED driver.
7. To avoid Voltage Drop, ensure wire gauge used with LED Strip Light is sufficient. Refer to Voltage Drop Chart.
8. Do not exceed maximum run recommended for Strip Light.
9. CELESTE™ LED Strip Light is designed to be cut at designated cut points only. Cutting anywhere other than the cut points will result in damage to the Strip Light.
10. Failure to follow safety warnings, and installation instructions will void the warranty for this product.


Handle product with care




DO NOT BEND LED TAPE LIGHT TO A DIAMETER LESS THAN 4 INCHES.




DO NOT BEND LED TAPE LIGHT ON A HORIZONTAL PLANE.



DO NOT FOLD, CREASE, OR TWIST LED TAPE LIGHT.

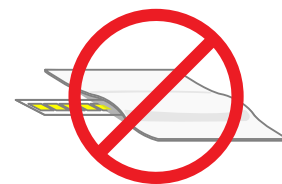


DO NOT COVER TAPE LIGHT WITH ANY MATERIALS.



DO NOT POWER TAPE LIGHT WHILE ATTACHED TO SPOOL OR TIGHTLY COILED.


1. Turn Power off at Circuit Breaker

Never cut tape attached to a live circuit. Do not exceed Class 2 Limit when loading CELESTE™ Connectors.

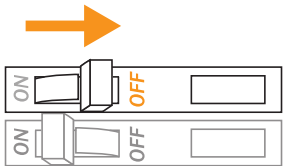


2. Cut Tape Light to Desired Length

Cut to desired length at line indicated with Scissors icon.

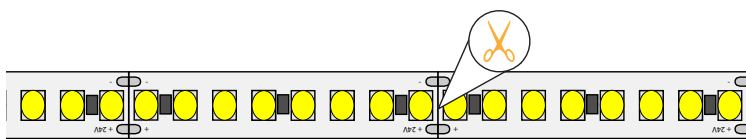

5. Insert Tape Light and Wire into Connector


Ensure polarity matches from the tape light to the wire.

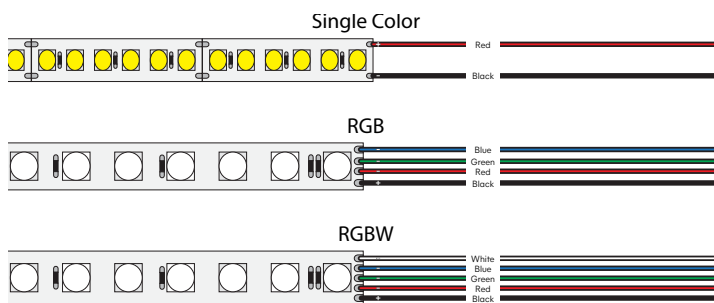

8. Mount Tape Light


Clean surface before mounting.

8.1 Peel off 3M™ Adhesive Backing. Ensure ambient temp in minimum 50°F (10°C) or tape will not adhere properly. Tear off backing along connector edge.

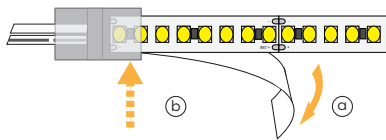


8. Mount Tape Light (cont.)

8.2 Adhere to a smooth, dry surface or channel, working one end to the other, being gentle with the LEDs.

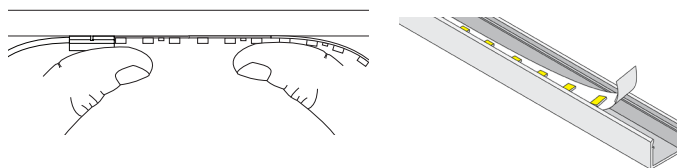


Wet Location

Mount with included mounting clips/screws. Silicone adhesive can also be utilized to mount tape to surfaces.

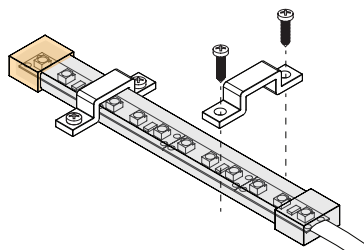

9. Turn Power on at Circuit Breaker

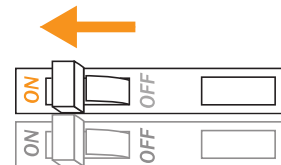

System Diagram

The following diagram is provided as an example system design. For information regarding larger systems or systems not pictured below, please see our web page or contact technical support. Always review each component installation guide for detailed and up-to-date wiring instructions. Install in accordance with national and local electrical codes.

Electronic Dimmable Driver System

