

VALENT® X TUNABLE WHITE 24V

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Date _____

Project Notes _____



FEATURES

- A single light source with three-CCT tunable white (1800K, 3500K, 6500K)
- 95+ CRI
- High performance lumen output - up to 450+ Lm/ft.
- 4.6 W/ft.
- 16.4 ft. Max. Run
- 12 Year Warranty



ORDERING CODES

Order spools, and components for field assembly

OPTIONAL ORDERING CODES

Add Assembly Preferences, Finish, Lens, Mounting, Driver, and Delivery

DI	Voltage	Model	CCT	Length	Channels				Finish	Lens	Mounting	Driver	Delivery
					A1 (A1)	SQ20 (20mm Square)	45 (45°)	MI2 (2-inch Mud-In)					
	24V (24V Volt)	VLX	TW1865 (1800K-6500K)	016 (16 feet) 100 (100 feet)	S1 (S1)	45DCO (45° Deco)	SL (Slim)	16 (16mm Square)	AL (Aluminum)	*blank* (Classic Frosted Lens)	3M (3M Adhesive)	O/O (On / Off)	Field Assembly
					S2 (S2)	90 (90° Sideview)	SQ (Square)		BL (Black)	BL (Black Lens)	MC (Mounting Clip)	PoE (Power over Ethernet)	Factory + Field (Hybrid)
					S45 (S45)	REC (Recessed)	ROD (Rod)		WH (White)	CLT (Arch. Clear Lens)	RC (Rotating Clip)		Factory Assembly
					RC20 (20mm Round)	REF (Reflector)	MI1 (1-inch Mud-In)			FRT (Arch. Frosted Lens)	CHN (Mounting Channel)		
										OPT (Opal Lens)			
										PD (Prem. Diffusion Lens)			

*See page 2 for Channel / Lens / Mounting compatibility

VALENT® X TUNABLE WHITE - SPECIFICATION TABLE

Models	24V-VLX-TW1865
Voltage	24VDC
Wattage	4.6W/ft.
Lumens 1800K-6500K	1800K: 114 Lm/ft. 3500K: 176 Lm/ft. 6500K: 184 Lm/ft. 1800K-3500K: 295 Lm/ft. 3500K-6500K: 354 Lm/ft. All: 481 Lm/ft.
Cut Points	2.46 in.
Max Run (ft.)	16.4 ft.
CRI	95+
Dimensions	0.47 x 0.05 in. (W x H)
TM-21 (LM-80)	>50,000 hours
Environment	Indoor/Damp Location (IP20)
LED Chips	117/ft.
Chip Type	2216
Certification	UL Listed 2108
Warranty	12 Year

VALENT® X TUNABLE WHITE 24V

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Date _____

Project Notes _____



CHANNEL / LENS / MOUNTING COMPATIBILITY

Channel	Compatible Lenses	Available Finishes	Mounting Options
A1 (A1)	FRT	AL / WH / BL	UC
S1 (S1)	*blank*	AL	UC
S2 (S2)	*blank*	AL	UC
S45 (S45)	*blank*	AL	UC
RC20 (20mm Round)	*blank*	AL	UC
SQ20 (20mm Square)	*blank*	AL	UC
45DCO (45° Deco)	*blank*	AL	MC
90 (90° Sideview)	*blank*	AL	MC
REC (Recessed)	*blank*	AL	3M
REF (Reflector)	*blank*	AL	
45 (45°)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / VC / RC / HNG
SL (Slim)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / 3M / MAG
SQ (Square)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / VC / RC / HNG
ROD (Rod)	*blank*	AL	RC / CLO / ART / ARM
M11 (1-inch Mud-In)	OPT	AL	
M12 (2-inch Mud-In)	OPT	AL	
16 (16mm Square)	FRT	AL	MC

LEGEND

Lens		Finish		Mounting	
blank	Classic Frosted Lens	AL	Aluminum	3M	3M Adhesive
BL	Black Lens	WH	White	ARM	Wall Arm
CLT	Architectural Clear Lens	BL	Black	ART	Art Lighting Arm
FRT	Architectural Frosted Lens			CLO	Closet Mount
OPT	Opal Lens			HNG	Hanging Hardware
PD	Premium Diffusion Lens			MAG	Magnetic Clip
				MC	Mounting Clip
				RC	Rotating Clip
				UC	U-Clip
				VC	Vertical Clip

VALENT® X TUNABLE WHITE 24V

Date _____

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI.

Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Project Notes _____



RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
A1 Channel DI-CHB-A1 (A1) 48", 90" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.81 in. Width (W): 0.87 in. Interior Depth (ID): 0.45 in. Interior Width (IW): 0.79 in. 	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • 1 retaining clip • End caps: 1x open, 1x closed. 90" Aluminum, Black, & White Channels • 90 in. channel & lens • 4x surface mounting clips • 2x strain relief clip • End caps: 2x open, 2x closed, 2x slotted	 10mm Tape Light: Soldered Lead Only	 Architectural Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	• Beam Angle: 120° Architectural Frosted Lens • Light Loss: 30% • CCT Shift: -35K • IP Rating Shift: IP40	 U-Clip: 0.82 × 0.88 in. (H x W)
S1 Channel DI-CHB-S1 (S1) 48", 90" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.31 in. Width (W): 0.87 in. Interior Depth (ID): 0.25 in. Interior Width (IW): 0.58 in. 	48 in. channel & frosted cover 2x surface mounting clips End caps: 1x open, 1x closed.	 10mm Tape Light: Soldered Lead Only	 Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Semi-Diffused	• Beam Angle: 120° Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40	 U-Clip: 0.32 × 0.68 in. (H x W)
S2 Channel DI-CHB-S2 (S2) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.57 in. Width (W): 0.74 in. Interior Depth (ID): 0.34 in. Interior Width (IW): 0.63 in. 	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws 96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	 10mm Tape Light: Soldered Lead Only	 Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	• Beam Angle: 120° Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40	 U-Clip: 0.58 × 0.75 in. (H x W)
S45 Channel DI-CHB-S45 (S45) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.78 in. Width (W): 0.78 in. Interior Depth (ID): 0.54 in. Interior Width (IW): 0.6 in. 	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws 96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	 10mm Tape Light: Soldered Lead Only	 Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	• Beam Angle: 120° Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40	 U-Clip: 0.79 × 0.79 in. (H x W)

VALENT® X TUNABLE WHITE 24V

Date _____

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Project Notes _____



RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
20mm Round Channel DI-CPCHB-RC20 (RC20) 48", 96" Aluminum <small>For 14mm Tape Lights or smaller</small>		48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed. 96 in. channel & frosted lens 4x surface mounting clips End caps: 2x open, 2x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	<ul style="list-style-type: none"> • Beam Angle: 180° • Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40 	<p>U-Clip: 1.19 x 1.19 in. (H x W)</p>
20mm Square Channel DI-CPCHB-SQC20 (SQ20) 48", 96" Aluminum <small>For 14mm Tape Lights or smaller</small>		48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed. 96 in. channel & frosted lens 4x surface mounting clips End caps: 2x open, 2x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	<ul style="list-style-type: none"> • Beam Angle: 180° • Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40 	<p>U-Clip: 1.19 x 1.19 in. (H x W)</p>
45° Deco Channel DI-CPCHB-45DCO (45DCO) 48", 96" Aluminum <small>For 10mm Tape Lights or smaller</small>		48 in. channel & frosted cover Mounting hardware End caps: 1x open, 1x closed. 96 in. channel & frosted cover Mounting hardware End caps: 2x open, 2x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	<ul style="list-style-type: none"> • Beam Angle: 120° • Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40 	<p>Mounting Clip: 0.73 x 0.73 in. (H x W)</p>
90° Sideview Channel DI-CPCHB-90SD (90) 48", 96" Aluminum <small>For 12mm Tape Lights or smaller</small>		48 in. channel & frosted cover Mounting hardware End caps: 1x open, 1x closed. 96 in. channel & frosted cover Mounting hardware End caps: 2x open, 2x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	<ul style="list-style-type: none"> • Beam Angle: 120° • Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40 	<p>Mounting Clip: 0.92 x 0.92 in. (H x W)</p>

VALENT® X TUNABLE WHITE 24V

Date _____

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Project Notes _____



RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
Recessed Channel DI-CPCHB-REC (REC) 48", 96" Aluminum <small>For 14mm Tape Lights or smaller</small>		48 in. channel & frosted lens 2x surface mounted clips end caps: 1x open, 1x closed 96 in. channel & frosted lens 4x surface mounted clips end caps: 2x open, 2x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless</p>	<ul style="list-style-type: none"> Beam Angle: 120° Classic Frosted Lens Light Loss: 20% CCT Shift: -40K IP Rating Shift: IP40 	<p>3M Adhesive: 0.59 × 1.03 in. (H x W)</p> <p>Recessed Mount: 0.49 × 1.03 in. (H x W)</p>
Reflector Channel DI-CPCHB-RFCTR (REF) 48", 96" Aluminum <small>For 12mm Tape Lights or smaller</small>		48 in. channel & frosted cover End caps: 1x open, 1x closed. 96 in. channel & frosted cover End caps: 1x open, 1x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless</p>	<ul style="list-style-type: none"> Beam Angle: 120° Classic Frosted Lens Light Loss: 20% CCT Shift: -40K IP Rating Shift: IP40 	<p>Recessed Mount: 2.75 × 1 in. (H x W)</p>
45° Channel DI-CPCHB-45 (45) 48", 96" Aluminum, White, Black <small>For 14mm Tape Lights or smaller</small>		48" Aluminum, Black, & White Channels • 48 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects 96" Aluminum Channel • 96 in. channel & clear, or frosted lens • 8x surface mounted clips • 4x End-to-end interconnects 96" Black & White Channels • 96 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Architectural Frosted Lens VALENT® X TUNABLE WHITE - VLX: Semi-Diffused</p> <p>Premium Diffusion Lens VLX: Dotless</p>	<ul style="list-style-type: none"> Beam Angle: 120° Architectural Clear Lens Light Loss: 10% CCT Shift: -20K Architectural Frosted Lens Light Loss: 30% CCT Shift: -35K Classic Frosted Lens Light Loss: 20% CCT Shift: -40K Black Lens Light Loss: 90% CCT Shift: -350K Premium Diffusion Lens Light Loss: 10% CCT Shift: -30K IP Rating Shift: IP40 	<p>Chromaphath Surface Mount: 1 × 0.67 in. (H x W)</p> <p>Vertical Mount: 1 × 0.67 in. (H x W)</p> <p>Rotating Mount: 1.68 × 0.67 in. (H x W)</p> <p>Hanging Mount: 1.9 × 0.67 in. (H x W)</p> <p>Premium Diffusion: 1.52 × 0.67 in. (H x W)</p>
Slim Channel DI-CPCHB-SL (SL) 48", 96" Aluminum, White, Black <small>For 14mm Tape Lights or smaller</small>		48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed 96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • end caps: 2x open, 2x closed	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Architectural Frosted Lens VALENT® X TUNABLE WHITE - VLX: Semi-Diffused</p> <p>Premium Diffusion Lens VLX: Dotless</p>	<ul style="list-style-type: none"> Beam Angle: 120° Architectural Frosted Lens Light Loss: 30% CCT Shift: -35K Classic Frosted Lens Light Loss: 20% CCT Shift: -40K IP Rating Shift: IP40 	<p>Slim Mount: 0.54 × 0.87 in. (H x W)</p> <p>3M Adhesive: 0.48 × 0.82 in. (H x W)</p> <p>Magnetic U-Clip: 0.59 × 0.82 in. (H x W)</p> <p>Premium Diffusion: 0.96 × 0.82 in. (H x W)</p>

VALENT® X TUNABLE WHITE 24V

Date _____

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Project Notes _____



RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
Square Channel DI-CPCHB-SQ (SQ) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48" Aluminum Channel • 48 in. channel & frosted lens • 2x surface mounting clips • End caps: 1x open, 1x closed. 48" Black & White Channels • 48 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects 96" Aluminum Channel • 96 in. channel & frosted lens • 4x surface mounting clips • End caps: 2x open, 2x closed. 96" Black & White Channels • 96 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Architectural Frosted Lens VALENT® X TUNABLE WHITE - VLX: Semi-Diffused</p> <p>Premium Diffusion Lens VLX: Dotless</p> <p>For diffusion options not listed, refer to Square Channel Specification Sheet.</p>	<ul style="list-style-type: none"> • Beam Angle: 120° • Architectural Clear Lens • Light Loss: 10% • CCT Shift: -20K • Architectural Frosted Lens • Light Loss: 30% • CCT Shift: -35K • Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • Black Lens • Light Loss: 90% • CCT Shift: -350K • Premium Diffusion Lens • Light Loss: 10% • CCT Shift: -30K • IP Rating Shift: IP40 	<p>Chromapath Surface Mount: 0.61 x 0.82 in. (H x W)</p> <p>Vertical Mount: 0.61 x 0.82 in. (H x W)</p> <p>Rotating Mount: 1.29 x 0.82 in. (H x W)</p> <p>Hanging Mount: 1.51 x 0.82 in. (H x W)</p> <p>Premium Diffusion: 1.13 x 0.82 in. (H x W)</p>
Rod Channel DI-CPCHB-RDCL (ROD) 48", 96" Aluminum For 12mm Tape Lights or smaller		78.74 in. channel & frosted lens 1x open end-cap, 1x closed end-cap 4 x 180° swivel brackets 2x Closet Mounting Brackets 2x Support Brackets	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Classic Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless</p>	<ul style="list-style-type: none"> • Beam Angle: 180° • Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K • IP Rating Shift: IP40 	<p>Rotating Mount: 1.69 x 0.95 in. (H x W)</p> <p>Closet Mount: 1.28 x 3.25 in. (H x W)</p> <p>Art Lighting Arm: 2.72 x 10.15 in. (H x W)</p> <p>Wall Arm: 4.5 x 2.15 in. (H x W)</p>
1-inch Mud-In Channel DI-CPCHB-MUD1 (MI1) 48", 96" Aluminum For 14mm Tape Lights or smaller		96 in. channel & opal lens 2x end-to-end connectors End caps: 2x open, 2x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Opal Lens VALENT® X TUNABLE WHITE - VLX: Dotless</p>	<ul style="list-style-type: none"> • Beam Angle: 120° • Opal Lens • Light Loss: 55% • CCT Shift: -200K • IP Rating Shift: IP40 	<p>Recessed Mount: 0.54 x 2.42 in. (H x W)</p>
2-inch Mud-In Channel DI-CPCHB-MUD2 (MI2) 48", 96" Aluminum For 14mm Tape Lights or smaller		96 in. channel & opal lens 2x surface mounting clips End caps: 2x open, 2x closed.	<p>10mm Tape Light: Soldered Lead Only</p>	<p>Opal Lens VALENT® X TUNABLE WHITE - VLX: Dotless</p>	<ul style="list-style-type: none"> • Beam Angle: 120° • Opal Lens • Light Loss: 55% • CCT Shift: -200K • IP Rating Shift: IP40 	<p>Recessed Mount: 0.8 x 3.86 in. (H x W)</p>

VALENT® X TUNABLE WHITE 24V

Date _____

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Project Notes _____



RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
16mm Square Channel DI-CPCHB-16MM (16) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.89 in. Width (W): 0.77 in. Interior Depth (ID): 0.58 in. Interior Width (IW): 0.63 in. 	48 in. channel & Architectural Frosted Lens 2x surface mounting clips End caps: 1x open, 1x closed. 96 in. channel & Architectural Frosted Lens 4x surface mounting clips End caps: 2x open, 2x closed.	 10mm Tape Light: Soldered Lead Only	Architectural Frosted Lens VALENT® X TUNABLE WHITE - VLX: Dotless	<ul style="list-style-type: none"> Beam Angle: 120° Architectural Frosted Lens Light Loss: 30% CCT Shift: -35K IP Rating Shift: IP40 	 Mounting Clip: 0.89 x 0.77 in. (H x W)

VALENT® X TUNABLE WHITE 24V

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Date _____

Project Notes _____



RECOMMENDED 24V DRIVERS

SKU	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE	MAXIMUM LOAD	MINIMUM LOAD	CLASS 2	DIMMABLE	LENGTH	WIDTH	HEIGHT
MEANWELL Constant Voltage Driver Drivers for on/off or PWM dimming applications.									
<small>MEANWELL Constant Voltage Driver Specification Sheet https://www.diodeled.com/custom/download/productFile/fileName/commercial-grade-CV-Driver-Specification%20Sheet%20(24V%20Models).pdf Contains: • Additional Models • Derating Curves • Additional Features • System Diagrams</small>									
DI-CV-MW24V60W-277-LPS3R	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	10.79 in.	7.34 in.	2.36 in.
DI-CV-MW24V60W-277-LPS	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	11.25 in.	3.75 in.	1.9 in.
DI-CV-MW24V90W-277-LPS3R	120 ~ 277VAC 50/60Hz	24V	90W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	10.79 in.	7.34 in.	2.36 in.
DI-CV-MW24V90W-277-LPL	120 ~ 277VAC 50/60Hz	24V	90W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	13.5 in.	4.5 in.	2.38 in.
DI-CV-24V150W-277	120 ~ 277VAC 50/60Hz	24V	150W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	9 in.	2.67 in.	1.5 in.
DI-CV-24V240W-277	120 ~ 277VAC 50/60Hz	24V	240W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	9.61 in.	2.67 in.	1.53 in.
DI-CV-24V320W-277	120 ~ 277VAC 50/60Hz	24V	320W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	9.92 in.	3.54 in.	1.72 in.
DI-CV-24V480W-277	120 ~ 277VAC 50/60Hz	24V	480W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	10.31 in.	4.92 in.	1.72 in.
DI-CV-24V600W-277	120 ~ 277VAC 50/60Hz	24V	600W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	11.02 in.	5.67 in.	1.9 in.
PoE (Power over Ethernet) Constant voltage platform, ready for Power over Ethernet (inquire)									

RECOMMENDED CONTROLLERS

SKU	DESCRIPTION
TOUCHDIAL™ Control Systems The TOUCHDIAL™ zone control system controls single color dimming, tunable white, and color changing LED lighting via mobile device and additional TOUCHDIAL controls.	
DI-RF-REM-TW3-4	TOUCHDIAL Color Control System, 3-Anchor Tunable White 4-Zone Remote Controller
DI-RF-REC-CV-A	TOUCHDIAL Color Control System - WiFi Receiver
DMX Color Control System DMX Color Control Systems	
DI-DMX-ESA	Nicolaudio Easy Stand Alone DMX LED Color Controller - 5k Memory
DI-1810	DMX512 4-Channel Decoder with Digital Display controls LED RGB and RGBW lighting fixtures



VALENT® X TUNABLE WHITE 24V

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.


Date _____

Project Notes _____



MECHANICAL DIAGRAMS

24V-VLX-TW1865

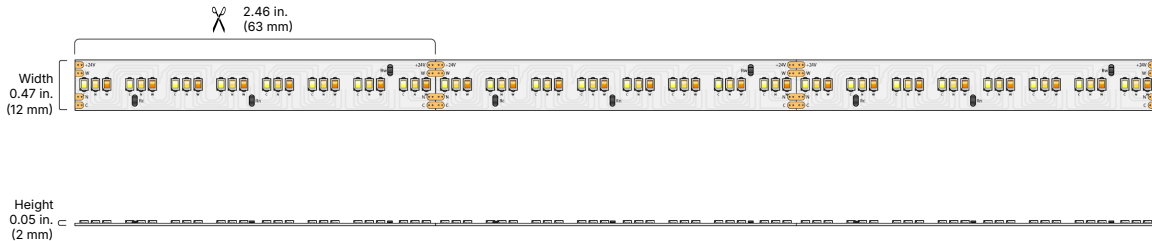

CONNECTIONS



DELIVERY OPTIONS

- **Field Assembly**
Fastest order fulfillment. Field connectors and accessories not included.
- **Factory + Field (Hybrid)**
Onsite modifications with factory connection. Additional accessories not included.
- **Factory Assembly**
Fastest Installation. Factory made-to-order fixtures.

- Lumen value measured in accordance to IES LM-80-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.

VALENT® X TUNABLE WHITE 24V

Flexible, high-density tape light offering three CCT options spanning from 1800K to 3500K to 6500K, with a 95+ CRI. Ensures accurate representation across the white light spectrum, optimizing the circadian rhythm experience without compromising color gamut or fidelity.

Date _____

Project Notes _____



CERTIFICATIONS

Safety

- UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750, UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.
- CE & EMC Compliant: Verification No. GZEM141200683705V
- Approved for storage areas of clothes closets per NEC 410.16.A.1,3 and 410.16.C.1,3,5

Environment

- Ambient Temperature: -4 ~ 122°F (-20 ~ 50°C)
- Operating Temperature: -4 ~ 176°F (-20 ~ 80°C)
- RoHS Compliant: Verification No. CANEC1610091501

Performance

- Can be used to comply with TITLE 24 Part 6 High Efficacy Lighting LED requirements - JA8-2016-2022-E
- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
8. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
9. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
10. Do not modify product beyond instructions or warranty will be void.
11. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
12. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
13. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

WARRANTY

Limited Warranty

- 12 Year limited warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.diodeled.com/limited-warranty/ within the Policies section. For warranty related questions please contact product support.

Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.