

### CELESTE® 24V

#### Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.


Date \_\_\_\_\_

Project Notes \_\_\_\_\_



#### FEATURES

- Unmatched performance for CRI, R9, Fidelity, & Gamut
- Consistent tight pitch (LED density) at all output levels
- Field or Factory Assembly
- Premium components extend lifespan and thermal performance
- Title 24 - JA8 Compliant
- 12 year warranty



#### ORDERING CODES

#### OPTIONAL ORDERING CODES

Order spools, and components for field assembly

Add Assembly Preferences, Finish, Lens, Mounting, Driver, and Delivery

Order Code	Voltage/Model	CCT	Length	Channels	Finish	Lens	Mounting	Driver	Delivery
VIP									
24CEL150	20 (2000K)	35 (3500K)	100 (100 feet)	A1 (A1) RC20 (20mm Round) REF (Reflector)	AL (Aluminum)	*blank* (Classic Frosted Lens)	3M (3M Adhesive)	ELV (Electronic)	Field Assembly
24CEL300	24 (2400K)	42 (4200K)		A2 (A2) SQ20 (20mm Square) ROD (Rod)	BL (Black)	AFR (Regress Lens)	MC (Mounting Clip)	SWX (Switchex)	Factory + Field (Hybrid)
24CEL500	27 (2700K)	50 (5000K)		A3 (A3) SQ (Square) REC (Recessed)	WH (White)	AFS (Arch. Frosted Satin Lens)	RC (Rotating Clip)	010 (0-10V)	Factory Assembly
24CEL800	30 (3000K)	63 (6300K)		SL (Slim) 45 (45°) SCNC (Sconce)		BL (Black Lens)	CHN (Mounting Channel)	PoE (Power over Ethernet)	
24CEL1000				16 (16MM) 90 (90° Sideview)		CLT (Arch. Clear Lens) FRT (Arch. Frosted Lens) PD (Prem. Diffusion Lens)			
*See page 3 for Channel / Lens / Mounting compatibility									

#### CELESTE® - SPECIFICATION TABLE

Models	24CEL150	24CEL300	24CEL500	24CEL800	24CEL1000
<b>Voltage</b>	<b>24VDC</b>	<b>24VDC</b>	<b>24VDC</b>	<b>24VDC</b>	<b>24VDC</b>
<b>Wattage</b>	<b>1.8W/ft.</b>	<b>3.3W/ft.</b>	<b>5.4W/ft.</b>	<b>7.5W/ft.</b>	<b>9.5W/ft.</b>
Lumens	2000K: 176 Lm/ft. 2400K: 173 Lm/ft. 2700K: 176 Lm/ft. 3000K: 166 Lm/ft. 3500K: 172 Lm/ft. 4200K: 174 Lm/ft. 5000K: 176 Lm/ft. 6300K: 181 Lm/ft.	314 Lm/ft. 295 Lm/ft. 318 Lm/ft. 337 Lm/ft. 346 Lm/ft. 364 Lm/ft. 373 Lm/ft. 374 Lm/ft.	506 Lm/ft. 472 Lm/ft. 507 Lm/ft. 541 Lm/ft. 561 Lm/ft. 590 Lm/ft. 591 Lm/ft. 641 Lm/ft.	691 Lm/ft. 762 Lm/ft. 775 Lm/ft. 846 Lm/ft. 843 Lm/ft. 855 Lm/ft. 906 Lm/ft. 974 Lm/ft.	846 Lm/ft. 911 Lm/ft. 976 Lm/ft. 1067 Lm/ft. 1045 Lm/ft. 1111 Lm/ft. 1136 Lm/ft. 1102 Lm/ft.
Cut Points	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.
Max Run (ft.)	55 ft.	47 ft.	31 ft.	26 ft.	24 ft.
CRI	95.6	96	96	96	96
Dimensions	0.47 x 0.1 in. (W x H)	0.47 x 0.1 in. (W x H)	0.47 x 0.1 in. (W x H)	0.47 x 0.1 in. (W x H)	0.47 x 0.1 in. (W x H)
Luminous Efficacy	97.8 Lm/ft.	95.2 Lm/ft.	93.7 Lm/ft.	92.1 Lm/ft.	89.1 Lm/ft.
SDCM Steps	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse
TM-21 (LM-80)	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours
Gold Plated PCB	Yes	Yes	Yes	Yes	Yes
Environment	Indoor / Damp Location (IP20)	Indoor / Damp Location (IP20)	Indoor / Damp Location (IP20)	Indoor / Damp Location (IP20)	Indoor / Damp Location (IP20)
LED Chips	72/ft.	72/ft.	72/ft.	72/ft.	72/ft.
Certification	UL Listed 2108	UL Listed 2108	UL Listed 2108	UL Listed 2108	UL Listed 2108
Warranty	12 Year	12 Year	12 Year	12 Year	12 Year

### CELESTE® 24V

#### Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### DETAILED SPECIFICATION TABLES

24CEL150								
	2000K	2400K	2700K	3000K	3500K	4200K	5000K	6300K
SDCM Steps	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse
Voltage	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC
Wattage	1.8W/ft.	1.8W/ft.	1.8W/ft.	1.8W/ft.	1.8W/ft.	1.8W/ft.	1.8W/ft.	1.8W/ft.
Delivered Lumens	176 Lm/ft.	173 Lm/ft.	176 Lm/ft.	166 Lm/ft.	172 Lm/ft.	174 Lm/ft.	176 Lm/ft.	181 Lm/ft.
Luminous Efficacy	97.8	96.1	97.8	92.2	95.6	96.7	97.8	100.6
Cut Points	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.
Max Run (ft.)	55 ft.	55 ft.	55 ft.	55 ft.	55 ft.	55 ft.	55 ft.	55 ft.

24CEL300								
	2000K	2400K	2700K	3000K	3500K	4200K	5000K	6300K
SDCM Steps	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse
Voltage	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC
Wattage	3.3W/ft.	3.3W/ft.	3.3W/ft.	3.3W/ft.	3.3W/ft.	3.3W/ft.	3.3W/ft.	3.3W/ft.
Delivered Lumens	314 Lm/ft.	295 Lm/ft.	318 Lm/ft.	337 Lm/ft.	346 Lm/ft.	364 Lm/ft.	373 Lm/ft.	374 Lm/ft.
Luminous Efficacy	95.2	89.4	96.4	102.1	104.8	110.3	113	113.3
Cut Points	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.
Max Run (ft.)	47 ft.	47 ft.	47 ft.	47 ft.	47 ft.	47 ft.	47 ft.	47 ft.

24CEL500								
	2000K	2400K	2700K	3000K	3500K	4200K	5000K	6300K
SDCM Steps	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse
Voltage	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC
Wattage	5.4W/ft.	5.4W/ft.	5.4W/ft.	5.4W/ft.	5.4W/ft.	5.4W/ft.	5.4W/ft.	5.4W/ft.
Delivered Lumens	506 Lm/ft.	472 Lm/ft.	507 Lm/ft.	541 Lm/ft.	561 Lm/ft.	590 Lm/ft.	591 Lm/ft.	641 Lm/ft.
Luminous Efficacy	93.7	87.4	93.9	100.2	103.9	109.3	109.4	118.7
Cut Points	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.
Max Run (ft.)	31 ft.	31 ft.	31 ft.	31 ft.	31 ft.	31 ft.	31 ft.	31 ft.

24CEL800								
	2000K	2400K	2700K	3000K	3500K	4200K	5000K	6300K
SDCM Steps	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse
Voltage	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC
Wattage	7.5W/ft.	7.5W/ft.	7.5W/ft.	7.5W/ft.	7.5W/ft.	7.5W/ft.	7.5W/ft.	7.5W/ft.
Delivered Lumens	691 Lm/ft.	762 Lm/ft.	775 Lm/ft.	846 Lm/ft.	843 Lm/ft.	855 Lm/ft.	906 Lm/ft.	974 Lm/ft.
Luminous Efficacy	92.1	101.6	103.3	112.8	112.4	114	120.8	129.9
Cut Points	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.
Max Run (ft.)	26 ft.	26 ft.	26 ft.	26 ft.	26 ft.	26 ft.	26 ft.	26 ft.

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### DETAILED SPECIFICATION TABLES

24CEL1000								
	2000K	2400K	2700K	3000K	3500K	4200K	5000K	6300K
SDCM Steps	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse	Single Step MacAdam Ellipse
Voltage	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC	24VDC
Wattage	9.5W/ft.	9.5W/ft.	9.5W/ft.	9.5W/ft.	9.5W/ft.	9.5W/ft.	9.5W/ft.	9.5W/ft.
Delivered Lumens	846 Lm/ft.	911 Lm/ft.	976 Lm/ft.	1067 Lm/ft.	1045 Lm/ft.	1111 Lm/ft.	1136 Lm/ft.	1102 Lm/ft.
Luminous Efficacy	89.1	95.9	102.7	112.3	110	116.9	119.6	116
Cut Points	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.	1.32 in.
Max Run (ft.)	24 ft.	24 ft.	24 ft.	24 ft.	24 ft.	24 ft.	24 ft.	24 ft.

### CHANNEL / LENS / MOUNTING COMPATIBILITY

Channel	Compatible Lenses	Available Finishes	Mounting Options
A1 (A1)	FRT	AL / WH / BL	UC
A2 (A2)	CLT / FRT / AFS / AFR	AL / WH / BL	UC
A3 (A3)	CLT / FRT / AFS / AFR	AL / WH / BL	UC
SL (Slim)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / 3M / MAG
16 (16MM)	FRT	AL	MC
RC20 (20mm Round)	*blank*	AL	UC
SQ20 (20mm Square)	*blank*	AL	UC
SQ (Square)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / AB / RC / HNG
45 (45°)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / VC / RC / HNG
90 (90° Sideview)	*blank*	AL	MC
REF (Reflector)	*blank*	AL	
ROD (Rod)	*blank*	AL	RC / CLO / ART / ARM
REC (Recessed)	*blank*	AL	/ MC
SCNC (Sconce)	*blank*	AL	3M

### LEGEND

Lens		Finish		Mounting	
*blank*	Classic Frosted Lens	AL	Aluminum	3M	3M Adhesive
AFR	Regress Lens	WH	White	AB	Aiming Bracket
AFS	Architectural Frosted Satin Lens	BL	Black	ARM	Wall Arm
BL	Black Lens			ART	Art Lighting Arm
CLT	Architectural Clear Lens			CLO	Closet Mount
FRT	Architectural Frosted Lens			HNG	Hanging Hardware
PD	Premium Diffusion Lens			MAG	Magnetic Clip
				MC	Mounting Clip
				RC	Rotating Clip
				UC	U-Clip
				VC	Vertical Clip

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>A1 Channel</b> VIP-CHB-A1  (A1) 48", 90" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.81 in. Width (W): 0.87 in. Interior Depth (ID): 0.45 in. Interior Width (IW): 0.79 in.  	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • 1 retaining clip • End caps: 1x open, 1x closed.  90" Aluminum, Black, & White Channels • 90 in. channel & lens • 4x surface mounting clips • 2x strain relief clip • End caps: 2x open, 2x closed, 2x slotted	 Soldered Lead Only	 Architectural Frosted Lens CELESTE® - 24CEL150: Dotless	• Beam Angle: 120° Architectural Frosted Lens • Light Loss: 10% • CCT Shift: -35K • IP Rating Shift: IP40	 U-Clip: 0.82 × 0.88 in. (H x W)
<b>A2 Channel</b> VIP-CHB-A2  (A2) 48", 96" Aluminum, White, Black For 12mm Tape Lights or smaller	Height (H): 0.55 in. Width (W): 0.63 in. Interior Depth (ID): 0.33 in. Interior Width (IW): 0.48 in.  	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed.  96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • End caps: 2x open, 2x closed.	 Soldered Lead Only	 Architectural Frosted Satin Lens CELESTE® - 24CEL150: Dotless  Architectural Frosted Lens 24CEL150, 24CEL300, 24CEL500, 24CEL800, 24CEL1000: Dotless  For diffusion options not listed, refer to A2 Channel Specification Sheet.	• Beam Angle: 120° Architectural Clear Lens • Light Loss: 10% • CCT Shift: -20K Architectural Frosted Lens • Light Loss: 10% • CCT Shift: -35K Architectural Frosted Satin Lens • Light Loss: 30% • CCT Shift: -35K • IP Rating Shift: IP40	 U-Clip: 0.56 × 0.64 in. (H x W)
<b>A3 Channel</b> VIP-CHB-A3  (A3) 48", 96" Aluminum, White, Black For 12mm Tape Lights or smaller	Height (H): 0.39 in. Width (W): 0.63 in. Interior Depth (ID): 0.33 in. Interior Width (IW): 0.48 in.  	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed.  96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • End caps: 2x open, 2x closed.	 Soldered Lead Only	 Architectural Frosted Satin Lens CELESTE® - 24CEL150: Dotless  Architectural Frosted Lens 24CEL150, 24CEL300, 24CEL500, 24CEL800, 24CEL1000: Dotless  For diffusion options not listed, refer to A3 Channel Specification Sheet.	• Beam Angle: 120° Architectural Clear Lens • Light Loss: 10% • CCT Shift: -20K Architectural Frosted Lens • Light Loss: 10% • CCT Shift: -35K Architectural Frosted Satin Lens • Light Loss: 30% • CCT Shift: -35K • IP Rating Shift: IP40	 U-Clip: 0.4 × 0.64 in. (H x W)
<b>Slim Channel</b> DI-CPCHB-SL  (SL) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.38 in. Width (W): 0.82 in. Interior Depth (ID): 0.3 in. Interior Width (IW): 0.67 in.  	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed  96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • End caps: 2x open, 2x closed	 Soldered Lead Only	 Architectural Frosted Lens CELESTE® - 24CEL150: Dotless  Premium Diffusion Lens 24CEL150, 24CEL300, 24CEL500, 24CEL800, 24CEL1000: Dotless  For diffusion options not listed, refer to Slim Channel Specification Sheet.	• Beam Angle: 120° Architectural Clear Lens • Light Loss: 10% • CCT Shift: -20K Architectural Frosted Lens • Light Loss: 30% • CCT Shift: -35K Classic Frosted Lens • Light Loss: 20% • CCT Shift: -40K Black Lens • Light Loss: 90% • CCT Shift: -350K Premium Diffusion Lens • Light Loss: 10% • CCT Shift: -30K • IP Rating Shift: IP40	 Slim Mount: 0.54 × 0.87 in. (H x W) 3M Adhesive: 0.48 × 0.82 in. (H x W) Magnetic U-Clip: 0.59 × 0.82 in. (H x W) Premium Diffusion: 0.96 × 0.82 in. (H x W)

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>16MM Channel</b> DI-CPCHB-16MM  (16) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.89 in. Width (W): 0.77 in. Interior Depth (ID): 0.58 in. Interior Width (IW): 0.63 in.  	48 in. channel & Architectural Frosted Lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & Architectural Frosted Lens 4x surface mounting clips End caps: 2x open, 2x closed.	 Soldered Lead Only	Architectural Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>Beam Angle: 120°</li> <li>Architectural Frosted Lens</li> <li>Light Loss: 10%</li> <li>CCT Shift: -35K</li> <li>IP Rating Shift: IP40</li> </ul>	 Mounting Clip: 0.89 x 0.77 in. (H x W)
<b>20mm Round Channel</b> DI-CPCHB-RC20  (RC20) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.18 in. Width (W): 1.18 in. Interior Depth (ID): 0.84 in. Interior Width (IW): 0.84 in.  	48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	 Soldered Lead Only	Classic Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>Beam Angle: 180°</li> <li>Classic Frosted Lens</li> <li>Light Loss: 20%</li> <li>CCT Shift: -40K</li> <li>IP Rating Shift: IP40</li> </ul>	 U-Clip: 1.19 x 1.19 in. (H x W)
<b>20mm Square Channel</b> DI-CPCHB-SQC20  (SQ20) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.18 in. Width (W): 1.18 in. Interior Depth (ID): 0.84 in. Interior Width (IW): 0.84 in.  	48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	 Soldered Lead Only	Classic Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>Beam Angle: 180°</li> <li>Classic Frosted Lens</li> <li>Light Loss: 20%</li> <li>CCT Shift: -40K</li> <li>IP Rating Shift: IP40</li> </ul>	 U-Clip: 1.19 x 1.19 in. (H x W)
<b>Square Channel</b> DI-CPCHB-SQ  (SQ) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.55 in. Width (W): 0.82 in. Interior Depth (ID): 0.27 in. Interior Width (IW): 0.67 in.  	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed.  96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • End caps: 2x open, 2x closed.	 Soldered Lead Only	Architectural Frosted Lens CELESTE® - 24CEL150: Dotless  Premium Diffusion Lens 24CEL150, 24CEL300, 24CEL500, 24CEL800, 24CEL1000: Dotless  For diffusion options not listed, refer to Square Channel Specification Sheet.	<ul style="list-style-type: none"> <li>Beam Angle: 120°</li> <li>Architectural Clear Lens</li> <li>Light Loss: 10%</li> <li>CCT Shift: -20K</li> <li>Architectural Frosted Lens</li> <li>Light Loss: 10%</li> <li>CCT Shift: -35K</li> <li>Classic Frosted Lens</li> <li>Light Loss: 20%</li> <li>CCT Shift: -40K</li> <li>Black Lens</li> <li>Light Loss: 90%</li> <li>CCT Shift: -350K</li> <li>Premium Diffusion Lens</li> <li>Light Loss: 10%</li> <li>CCT Shift: -30K</li> <li>IP Rating Shift: IP40</li> </ul>	 Chromaphath Surface Mount: 0.61 x 0.82 in. (H x W)   Aiming Bracket: 1.29 x 0.82 in. (H x W)   Rotating Mount: 1.93 x 0.82 in. (H x W)   Hanging Mount: 1.51 x 0.82 in. (H x W)   Premium Diffusion: 1.13 x 0.82 in. (H x W)

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>45° Channel</b> DI-CPCHB-45  (45) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed.  96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • End caps: 2x open, 2x closed.	<p>Soldered Lead Only</p>	Architectural Frosted Lens CELESTE® - 24CEL150: Dotless  Premium Diffusion Lens 24CEL150, 24CEL300, 24CEL500, 24CEL800, 24CEL1000: Dotless  For diffusion options not listed, refer to 45° Channel Specification Sheet.	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Architectural Clear Lens</li> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> <li>• Architectural Frosted Lens</li> <li>• Light Loss: 10%</li> <li>• CCT Shift: -35K</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• Black Lens</li> <li>• Light Loss: 90%</li> <li>• CCT Shift: -350K</li> <li>• Premium Diffusion Lens</li> <li>• Light Loss: 10%</li> <li>• CCT Shift: -30K</li> <li>• IP Rating Shift: IP40</li> </ul>	
<b>90° Sideview Channel</b> DI-CPCHB-90SD  (90) 48", 96" Aluminum For 12mm Tape Lights or smaller		48 in. channel & frosted cover Mounting hardware End caps: 1x open, 1x closed.  96 in. channel & frosted cover Mounting hardware End caps: 2x open, 2x closed.	<p>Soldered Lead Only</p>	Classic Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	
<b>Reflector Channel</b> DI-CPCHB-RFCTR  (REF) 48", 96" Aluminum For 12mm Tape Lights or smaller		48 in. channel & frosted cover End caps: 1x open, 1x closed.  96 in. channel & frosted cover End caps: 1x open, 1x closed.	<p>Soldered Lead Only</p>	Classic Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	
<b>Rod Channel</b> DI-CPCHB-RDCL  (ROD) 48", 96" Aluminum For 12mm Tape Lights or smaller		78.74 in. channel & frosted lens 1x open end-cap, 1x closed end-cap 4x 180° swivel brackets 2x Closet Mounting Brackets 2x Support Brackets	<p>Soldered Lead Only</p>	Classic Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>Recessed Channel</b> DI-CPCHB-REC  (REC) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.49 in. Width (W): 1.03 in. Interior Depth (ID): 0.42 in. Interior Width (IW): 0.59 in. Cut Out Width (CO): 0.74 in. Recessed Wing (RW): 0.15 in.  	48 in. channel & frosted lens 2x surface mounted clips end caps: 1x open, 1x closed  96 in. channel & frosted lens 4x surface mounted clips end caps: 2x open, 2x closed.	 Soldered Lead Only	Classic Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	 Recessed Mount: 0.49 x 1.03 in. (H x W) Mounting Clip: 0.49 x 1.03 in. (H x W)
<b>Sconce Channel</b> DI-CPCHB-SCNC  (SCNC) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.1 in. Width (W): 1.21 in. Interior Depth (ID): 0.53 in. Interior Width (IW): 0.84 in.  	48 in. channel, 2x frosted cover Mounting plate End caps: 1x open, 1x closed.  96 in. channel, 2x frosted cover Mounting plate End caps: 1x open, 1x closed.	 Soldered Lead Only	Classic Frosted Lens CELESTE® - 24CEL150: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	 3M Adhesive: 1.2 x 1.21 in. (H x W)

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_




### RECOMMENDED 24V DRIVERS

SKU	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE	MAXIMUM LOAD	MINIMUM LOAD	CLASS 2	DIMMABLE	LENGTH	WIDTH	HEIGHT
<b>JUSTIN Inc. Magnetic Driver</b> Compatible with a wide range of dimmers and control systems including Lutron Homeworks and its derivatives.									
							Contains • Additional Models • Derating Curves • Additional Features • System Diagrams		
481-24DCR	120VAC / 240VAC / 277VAC (50/60Hz)	24V	48W	>50% load is recommended for optimum dimming performance. Results may vary when dimming loads below 50% down to 10%.	Yes	Yes, using Magnetic Low Voltage dimmer	11.25 in.	3.37 in.	3.25 in.
482-24DCR-240	120VAC / 240VAC / 277VAC (50/60Hz)	24V	48W	>50% load is recommended for optimum dimming performance. Results may vary when dimming loads below 50% down to 10%.	Yes	Yes, using Magnetic Low Voltage dimmer	11.25 in.	3.37 in.	3.25 in.
483-24DCR-277	120VAC / 240VAC / 277VAC (50/60Hz)	24V	48W	>50% load is recommended for optimum dimming performance. Results may vary when dimming loads below 50% down to 10%.	Yes	Yes, using Magnetic Low Voltage dimmer	11.25 in.	3.37 in.	3.25 in.
961-24DCR	120VAC / 240VAC / 277VAC (50/60Hz)	24V	96W	>50% load is recommended for optimum dimming performance. Results may vary when dimming loads below 50% down to 10%.	Yes	Yes, using Magnetic Low Voltage dimmer	11.25 in.	3.37 in.	3.25 in.
<b>OMNIDRIVE® X Dimmable Driver</b> Versatile driver for most high-performance dimming on ELV, TRIAC, and 0-10V systems.									
							OMNIDRIVE® X Dimmable Driver Specification Sheet <a href="https://www.dioledd.com/custom/download/productFile/fileName/omnidrive-x-specification-sheet.pdf">https://www.dioledd.com/custom/download/productFile/fileName/omnidrive-x-specification-sheet.pdf</a>		
							Contains • Additional Models • Derating Curves • Additional Features • System Diagrams		
DI-ODX-24V30W-J	120-277V	24V	30W	No Minimum Load	Yes	Yes	6.5 in.	3.7 in.	1.57 in.
DI-ODX-24V60W-J	120-277V	24V	60W	No Minimum Load	Yes	Yes	7.4 in.	3.7 in.	1.57 in.
DI-ODX-24V96W-J	120-277V	24V	96W	No Minimum Load	Yes	Yes	8.66 in.	3.7 in.	1.57 in.
<b>VLM Series Constant Voltage Driver</b> Compact driver for on/off, PWM dimming, and color-changing applications.									
							VLM Series Constant Voltage Driver Specification Sheet <a href="https://www.dioledd.com/custom/download/productFile/fileName/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf">https://www.dioledd.com/custom/download/productFile/fileName/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf</a>		
							Contains • Additional Models • Derating Curves • Additional Features • System Diagrams		
VLM60W-24-LPS3R	120 / 277VAC 47 - 63Hz	24V	60W	No Minimum Load	Yes	PWM	10.79 in.	7.34 in.	2.36 in.
VLM60W-24-LPM	120 / 277VAC 47 - 63Hz	24V	60W	No Minimum Load	Yes	PWM	8.19 in.	2.94 in.	1.31 in.
<b>PoE (Power over Ethernet)</b> Constant voltage platform, ready for Power over Ethernet (inquire)									

### RECOMMENDED CONTROLLERS

SKU	DESCRIPTION
<b>Nicolaudie DMX LED Controllers</b> Store up to 500 scenes across 10 separate zones with a full-color display.	
DI-DMX-DE3	Nicolaudie STICK-DE3 DMX LED Controller
DI-DMX-ESA	Nicolaudie Easy Stand Alone DMX LED Color Controller - 5k Memory
DI-DMX-KE2	Nicolaudie STICK 1 Wall Mount DMX LED Controller - KE2
<b>Other Color Control Systems</b> DMX Color Control Systems	
DI-0820	DMX Wireless Transmitter/Receiver - Female
DI-0821	DMX Wireless Transmitter/Receiver - Male

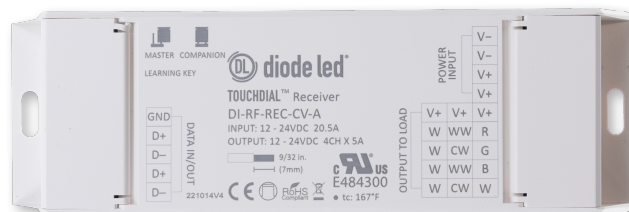

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### MECHANICAL DIAGRAMS


24CEL1000

24CEL150


24CEL300

24CEL500

24CEL800

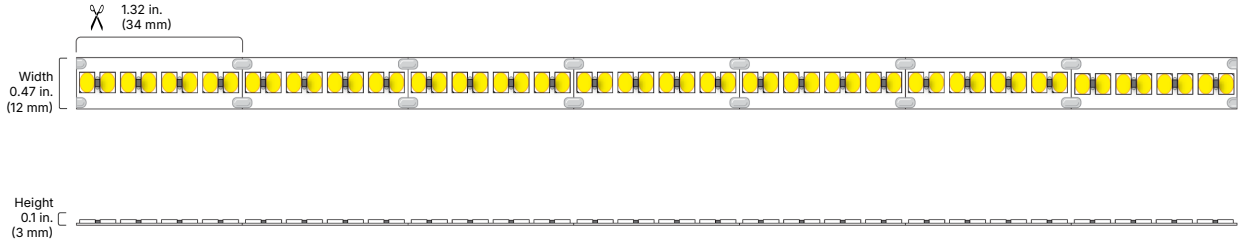

### CONNECTIONS



36 Bare Lead 20/2 AWG UL 2464 Wire with Strain Relief

36 Bare Lead 20/2 AWG UL 2464 Wire with Strain Relief

### DELIVERY OPTIONS

- **Field Assembly**  
Fastest order fulfillment. Field connectors and accessories not included.
- **Factory + Field (Hybrid)**  
Onsite modifications with factory connection. Additional accessories not included.
- **Factory Assembly**  
Fastest Installation. Factory made-to-order fixtures.

- Lumen value measured in accordance to IES LM-80-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.

### CELESTE® 24V Flexible Linear Lighting

The CELESTE® light engine is designed for precision and delivers flawless light quality. Unmatched performance for CRI, R9, Fidelity, & Gamut with a 12 year warranty. Pair with channel profiles for a complete system.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



## CERTIFICATIONS

### Safety

- UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750, UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.
- UL Recognized Component - Sign Accessories. Available in UL Sign Components Manual (SAM Manual). File # E469770.
- CE & EMC Compliant: Verification No. GZEM141200683705V

### Environment

- RoHS Compliant: Verification No. CANEC1610091501

### Performance

- Can be used to comply with TITLE 24 Part 6 High Efficacy Lighting LED requirements - JA8-2016-2022-E
- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

### Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
8. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings.
9. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
10. Do not modify product beyond instructions or warranty will be void.
11. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
12. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
13. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

## WARRANTY

### Limited Warranty

- 12 Year warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at [www.dioded.com/limited-warranty/](http://www.dioded.com/limited-warranty/) within the Policies section. For warranty related questions please contact product support.

### Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.