

### VALENT® X

### High Density LED Tape Light

Precision-engineered, high density tape light for demanding applications.  
Up to 900+ lumens per foot with 95+ CRI / 90+ R9. 12 year Limited Warranty.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### FEATURES


- Dense LED placement for uninterrupted linear light
- 100/200/300/500/800 lumen outputs
- 95+ CRI
- 1.32 inch cuttable increments
- Precision color rendering with 90+ R9 value
- Channel (extrusion) not required for heat sink
- 12 Year Limited Warranty

ORDERING CODES					HYBRID ORDERING CODE (OPTIONAL)						
Order spools, and components for field assembly					Soldered Wire Lead and Connection Options						
DI	Voltage	Model	CCT		Length	Input Wire Color, Length, and Connection			Output Wire Color, Length, and Connection		
	24V (24V Volt)	VLX1 VLX2 VLX3 VLX5 VLX8	20 (2000K)	35 (3500K)	016 (16 feet)	Color & Type <b>WH</b> (White CL2 - Default)	Length <b>36l</b> (36 in. - Default)	Connection <b>BW</b> (Bare Wire - Default)	Color & Type <b>*blank*</b> (No Wire - Default)	Length _ in.	Connection <b>BW</b> (Bare Wire - Default)
			22 (2200K)	40 (4000K)	100 (100 feet)						
			24 (2400K)	50 (5000K)	CSTM_ (_in.)	SV (Silver Plenum - Bare Lead only)	MIC (Interconnect)	BL (Black CL2)	SV (Silver Plenum - Bare Lead only)	DC (Barrel)	MIC (Interconnect)
			27 (2700K)	63 (6300K)							
			30 (3000K)								


GENERAL SPECIFICATIONS (ALL MODELS)	
Voltage	24VDC
Cut Points	1.32 in.
Dimmable	Yes
CRI	95+
Dimensions	0.47 x 0.1 in. (W x H)
TM-21 (LM-80)	>50,000 hours
Environment	Indoor / Damp Location (IP20)
Lead Wire A	36 in. Bare Lead 20/2 AWG UL 2464 Wire with Strain Relief
Lead Wire B	36 in. Bare Lead 20/2 AWG UL 2464 Wire with Strain Relief
LED Chips	72/ft.
Chip Type	2835
Certification	UL Listed 2108
Limited Warranty	12 Year Limited Warranty

DETAILED SPECIFICATIONS						
	24V-VLX1	24V-VLX2	24V-VLX3	24V-VLX5	24V-VLX8	
Lumen Series	100	200	300	500	800	
Wattage	1W/ft.	1.9W/ft.	2.8W/ft.	4.6W/ft.	7.2W/ft.	
Max Run (ft.)	80 ft.	53 ft.	41 ft.	30 ft.	19 ft.	
2000K	104 Lm/ft.	194 Lm/ft.	299 Lm/ft.	-	-	
2200K	104 Lm/ft.	194 Lm/ft.	299 Lm/ft.	-	-	
2400K	104 Lm/ft.	194 Lm/ft.	299 Lm/ft.	469 Lm/ft.	730 Lm/ft.	
2700K	101 Lm/ft.	207 Lm/ft.	311 Lm/ft.	495 Lm/ft.	782 Lm/ft.	
3000K	106 Lm/ft.	218 Lm/ft.	323 Lm/ft.	557 Lm/ft.	853 Lm/ft.	
3500K	108 Lm/ft.	218 Lm/ft.	328 Lm/ft.	586 Lm/ft.	906 Lm/ft.	
4000K	112 Lm/ft.	228 Lm/ft.	342 Lm/ft.	534 Lm/ft.	806 Lm/ft.	
5000K	116 Lm/ft.	242 Lm/ft.	365 Lm/ft.	592 Lm/ft.	840 Lm/ft.	
6300K	112 Lm/ft.	244 Lm/ft.	363 Lm/ft.	578 Lm/ft.	924 Lm/ft.	

MECHANICAL DIAGRAMS

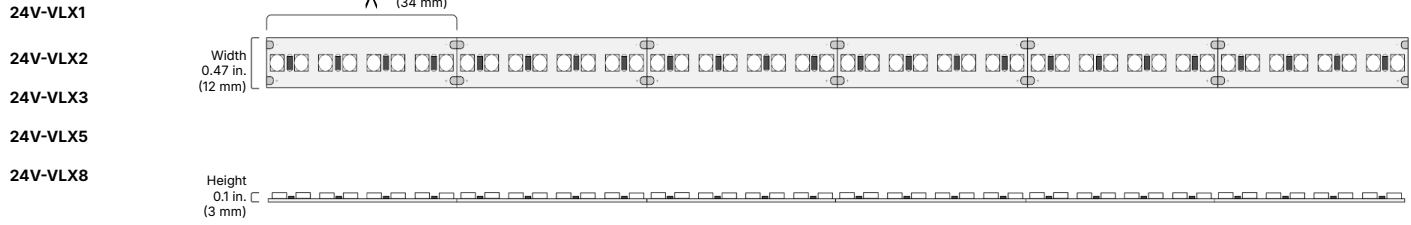


CONNECTIONS



### ACCESSORIES


#### DI-TB12-CONN-TTW

Tape Light Terminal Block Connector, Screw Down, 12mm, Tape-To-Wire




#### DI-TB12-CONN-TTT

Tape Light Terminal Block Connector, Screw Down, 12mm, Tape-To-Tape




#### DI-TB12-90-TTT

Tape Light 90 Degree Corner Connector With Attached 12mm Tape-to-Tape Terminal Blocks




#### DI-TB12-60SPL-TTW

Tape Light Terminal Block, 12mm, Lead Wire Attached (Tape to Wire), 60 in. 20 AWG Splice Wire, White

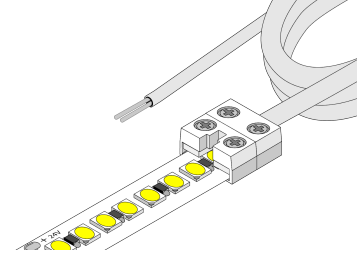


#### DI-TB12-6JPR-TTT

Tape Light Terminal Block, 12mm, Jumper Cable (Tape to Tape), 6 in. 20 AWG Wire Lead, White




#### DI-TB12-60JPR-TTT

Tape Light Terminal Block, 12mm, Jumper Cable (Tape to Tape), 60 in. 20 AWG Wire Lead, White



#### DI-0708

DC Extension Cable - White, 39 in.



#### DI-0708B

1 Meter DC Extension Cable - Black



### DELIVERY OPTIONS

- **Field Assembly**  
Fastest order fulfillment. Field connectors and accessories not included.
- **Factory + Field (Hybrid)**  
Onsite modifications with factory connection. Additional accessories not included.
- **Factory Assembly**  
Fastest Installation. Factory made-to-order fixtures.

### RECOMMENDED CHANNELS


For additional information visit:  
<https://lucettaighting.com/products/channel-profiles>



- S1
- S2
- S45
- A1
- A2
- A3
- SLIM
- 16MM

- 20MM ROUND
- 20MM SQUARE
- SQUARE
- 45°
- 90° SIDEVIEW
- REFLECTOR
- ROD
- S1 CUT-OFF

- MUD-IN 1 IN.
- MUD-IN SINGLE FLANGE
- MUD-IN 1 IN. WALL REVEAL
- MUD-IN 2 IN.
- RECESSED
- SCONCE
- WAVEFORM



MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>S1 Channel</b> DI-CHB-S1 (S1) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.31 in. Width (W): 0.67 in. Interior Depth (ID): 0.25 in. Interior Width (IW): 0.58 in. 	48 in. channel & frosted cover 2x surface mounting clips End caps: 1x open, 1x closed.	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	U-Clip: 0.32 x 0.68 in. (H x W) S1 Magnetic U-Clip: 0.53 x 0.67 in. (H x W)
<b>S2 Channel</b> DI-CHB-S2 (S2) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.57 in. Width (W): 0.74 in. Interior Depth (ID): 0.34 in. Interior Width (IW): 0.65 in. 	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws  96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	S2 Clip: 0.63 x 0.84 in. (H x W)
<b>S45 Channel</b> DI-CHB-S45 (S45) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.78 in. Width (W): 0.75 in. Interior Depth (ID): 0.54 in. Interior Width (IW): 0.6 in. 	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws  96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	U-Clip: 0.79 x 0.79 in. (H x W)
<b>A1 Channel</b> DI-CHB-A1 (A1) 48", 90" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.81 in. Width (W): 0.87 in. Interior Depth (ID): 0.45 in. Interior Width (IW): 0.79 in. 	48 in. channel & lens 2x surface mounting clips 1 retaining clip End caps: 1x open, 1x closed.  90 in. channel & lens 4x surface mounting clips 2x strain relief clip End caps: 2x open, 2x closed, 2x slotted  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed, 2x slotted	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Architectural Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Architectural Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul>	U-Clip: 0.82 x 0.88 in. (H x W)
<b>A2 Channel</b> DI-CHB-A2 (A2) 48", 96" Aluminum, White, Black	Height (H): 0.55 in. Width (W): 0.63 in. Interior Depth (ID): 0.33 in. Interior Width (IW): 0.48 in. 	48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Architectural Frosted Satin Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  Architectural Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  For diffusion options not listed, refer to A2 Channel Specification Sheet.	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Architectural Clear Lens <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> </ul> Architectural Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul> Architectural Frosted Satin Lens <ul style="list-style-type: none"> <li>• Light Loss: 45%</li> <li>• CCT Shift: -80K</li> </ul> Regress Lens <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul>	U-Clip: 0.56 x 0.64 in. (H x W)

### RECOMMENDED CHANNELS


For additional information visit:  
<https://lucettaighting.com/products/channel-profiles>



- S1
- S2
- S45
- A1
- A2
- A3
- SLIM
- 16MM

- 20MM ROUND
- 20MM SQUARE
- SQUARE
- 45°
- 90° SIDEVIEW
- REFLECTOR
- ROD
- S1 CUT-OFF

- MUD-IN 1 IN.
- MUD-IN SINGLE FLANGE
- MUD-IN 1 IN. WALL REVEAL
- MUD-IN 2 IN.
- RECESSED
- SCONCE
- WAVEFORM



MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>A3 Channel</b> DI-CHB-A3 (A3) 48", 96" Aluminum, White, Black For 12mm Tape Lights or smaller		48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Architectural Frosted Satin Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  Architectural Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  For diffusion options not listed, refer to A3 Channel Specification Sheet.	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Architectural Clear Lens <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> </ul> Architectural Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul> Architectural Frosted Satin Lens <ul style="list-style-type: none"> <li>• Light Loss: 45%</li> <li>• CCT Shift: -80K</li> </ul> Regress Lens <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul>	<p>U-Clip: 0.4 x 0.64 in. (H x W)</p>
<b>SLIM Channel</b> DI-CPCHB-SL (SL) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed  96 in. channel & lens 4x surface mounting clips end caps: 2x open, 2x closed	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Architectural Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  Premium Diffusion Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  For diffusion options not listed, refer to SLIM Channel Specification Sheet.	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Architectural Clear Lens <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> </ul> Architectural Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul> Premium Diffusion Lens <ul style="list-style-type: none"> <li>• Light Loss: 10%</li> <li>• CCT Shift: -30K</li> </ul>	<p>Slim Mount: 0.54 x 0.87 in. (H x W)</p> <p>3M Adhesive: 0.48 x 0.82 in. (H x W)</p> <p>Magnetic U-Clip: 0.59 x 0.82 in. (H x W)</p> <p>Premium Diffusion: 0.96 x 0.82 in. (H x W)</p>
<b>16MM Channel</b> DI-CPCHB-16MM (16) 48", 96" Aluminum For 14mm Tape Lights or smaller		48 in. channel & Architectural Frosted Lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & Architectural Frosted Lens 4x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Architectural Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Architectural Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> </ul>	<p>Mounting Clip: 0.89 x 0.77 in. (H x W)</p>
<b>20MM ROUND Channel</b> DI-CPCHB-RC20 (RC20) 48", 96" Aluminum For 14mm Tape Lights or smaller		48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	<p>U-Clip: 1.19 x 1.19 in. (H x W)</p>
<b>20MM SQUARE Channel</b> DI-CPCHB-SQC20 (SQ20) 48", 96" Aluminum		48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	<p>U-Clip: 1.19 x 1.19 in. (H x W)</p>

### RECOMMENDED CHANNELS


For additional information visit:  
<https://lucettaighting.com/products/channel-profiles>



- S1
- S2
- S45
- A1
- A2
- A3
- SLIM
- 16MM

- 20MM ROUND
- 20MM SQUARE
- SQUARE
- 45°
- 90° SIDEVIEW
- REFLECTOR
- ROD
- S1 CUT-OFF

- MUD-IN 1 IN.
- MUD-IN SINGLE FLANGE
- MUD-IN 1 IN. WALL REVEAL
- MUD-IN 2 IN.
- RECESSED
- SCONCE
- WAVEFORM



MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>SQUARE Channel</b> DI-CPCHB-SQ (SQ) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Architectural Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  Premium Diffusion Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  For diffusion options not listed, refer to SQUARE Channel Specification Sheet.	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> <li>• Architectural Clear Lens</li> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> <li>• Architectural Frosted Lens</li> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• Premium Diffusion Lens</li> <li>• Light Loss: 10%</li> <li>• CCT Shift: -30K</li> </ul>	
<b>45° Channel</b> DI-CPCHB-45 (45) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		48 in. channel & lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & lens 4x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Architectural Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  Premium Diffusion Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless  For diffusion options not listed, refer to 45° Channel Specification Sheet.	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> <li>• Architectural Clear Lens</li> <li>• Light Loss: 10%</li> <li>• CCT Shift: -20K</li> <li>• Architectural Frosted Lens</li> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• Premium Diffusion Lens</li> <li>• Light Loss: 10%</li> <li>• CCT Shift: -30K</li> </ul>	
<b>90° SIDEVIEW Channel</b> DI-CPCHB-90SD (90) 48", 96" Aluminum For 12mm Tape Lights or smaller		48 in. channel & frosted cover Mounting hardware End caps: 1x open, 1x closed.  96 in. channel & frosted cover Mounting hardware End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	
<b>REFLECTOR Channel</b> DI-CPCHB-RFCTR (REF) 48", 96" Aluminum For 12mm Tape Lights or smaller		48 in. channel & frosted cover End caps: 1x open, 1x closed.  96 in. channel & frosted cover End caps: 1x open, 1x closed.	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	
<b>ROD Channel</b> DI-CPCHB-RDCL (ROD) 48", 96" Aluminum		78.74 in. channel & frosted lens 1x open end-cap, 1x closed end-cap 4x 180° swivel brackets 2x Closet Mounting Brackets 2x Support Brackets	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• IP Rating Shift: IP20</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	

### RECOMMENDED CHANNELS


For additional information visit:  
<https://lucettaighting.com/products/channel-profiles>



- S1
- S2
- S45
- A1
- A2
- A3
- SLIM
- 16MM

- 20MM ROUND
- 20MM SQUARE
- SQUARE
- 45°
- 90° SIDEVIEW
- REFLECTOR
- ROD
- S1 CUT-OFF

- MUD-IN 1 IN.
- MUD-IN SINGLE FLANGE
- MUD-IN 1 IN. WALL REVEAL
- MUD-IN 2 IN.
- RECESSED
- SCONCE
- WAVEFORM



MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>S1 CUT-OFF Channel</b> DI-CHB-S1CO (S1CO) 96" Aluminum For 12mm Tape Lights or smaller		96 in. channel & lens 4x rotating mounting clips End caps: 2x open, 2x closed	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	
<b>MUD-IN 1 IN. Channel</b> DI-CPCHB-MUD1 (M1) 48", 96" Aluminum For 14mm Tape Lights or smaller		96 in. channel & opal lens 2x end-to-end connectors End caps: 2x open, 2x closed.  96 in. channel & lens End caps: 2x open, 2x closed	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Opal Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul> Opal Lens <ul style="list-style-type: none"> <li>• Light Loss: 55%</li> <li>• CCT Shift: -200K</li> </ul>	
<b>MUD-IN SINGLE FLANGE Channel</b> DI-CPCHB-MUD1-SF (MUD1-SF) 96" Aluminum For 14mm Tape Lights or smaller		96 in. channel & lens End caps: 2x open, 2x closed	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	
<b>MUD-IN 1 IN. WALL REVEAL Channel</b> DI-CPCHB-MUD1-WREV (MUD1-WREV) 96" Aluminum For 14mm Tape Lights or smaller		96 in. channel & lens End caps: 2x open, 2x closed	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	
<b>MUD-IN 2 IN. Channel</b> DI-CPCHB-MUD2 (M12) 48", 96" Aluminum		96 in. channel & opal lens 2x surface mounting clips End caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Opal Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Opal Lens <ul style="list-style-type: none"> <li>• Light Loss: 55%</li> <li>• CCT Shift: -200K</li> </ul>	

### RECOMMENDED CHANNELS

For additional information visit:


<https://lucettaighting.com/products/channel-profiles>



- S1
- S2
- S45
- A1
- A2
- A3
- SLIM
- 16MM

- 20MM ROUND
- 20MM SQUARE
- SQUARE
- 45°
- 90° SIDEVIEW
- REFLECTOR
- ROD
- S1 CUT-OFF

- MUD-IN 1 IN.
- MUD-IN SINGLE FLANGE
- MUD-IN 1 IN. WALL REVEAL
- MUD-IN 2 IN.
- RECESSED
- SCONCE
- WAVEFORM



MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>RECESSED Channel</b> DI-CPCHB-REC (REC) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.49 in. Width (W): 1.03 in. Interior Depth (ID): 0.42 in. Interior Width (IW): 0.59 in. Recessed Wing (RW): 0.74 in. Mounting Canal (MC): 0.15 in. 	48 in. channel & frosted lens 2x surface mounted clips end caps: 1x open, 1x closed  96 in. channel & frosted lens 4x surface mounted clips end caps: 2x open, 2x closed.	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	Recessed Mount: 0.49 x 1.03 in. (H x W) Mounting Clip: 0.49 x 1.03 in. (H x W)
<b>SCONCE Channel</b> DI-CPCHB-SCNC (SCNC) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.1 in. Width (W): 1.21 in. Interior Depth (ID): 0.53 in. Interior Width (IW): 0.84 in. 	48 in. channel, 2x frosted cover Mounting plate End caps: 1x open, 1x closed.  96 in. channel, 2x frosted cover Mounting plate End caps: 1x open, 1x closed.	<ul style="list-style-type: none"> <li>• 12mm Terminal Block</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	3M Adhesive: 1.2 x 1.21 in. (H x W)
<b>WAVEFORM Channel</b> DI-CPCHB-WF (WF) 48" Aluminum For 12mm Tape Lights or smaller	Height (H): 0.3 in. Width (W): 0.71 in. Interior Depth (ID): 0.25 in. Interior Width (IW): 0.49 in. Cut Out (CO): 0.2 in. 	48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed.	<ul style="list-style-type: none"> <li>• Soldered Lead Only</li> </ul>	Classic Frosted Lens VLX1, VLX2, VLX3, VLX5, VLX8: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• IP Rating Shift: IP20</li> </ul> Classic Frosted Lens <ul style="list-style-type: none"> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> </ul>	3M Adhesive: 0.4 x 0.71 in. (H x W) U-Clip: 0.31 x 0.72 in. (H x W)

### RECOMMENDED POWER SUPPLIES

For additional Power Supply information, refer to individual Specification Sheet data at diodeled.com.

- OMNIDRIVE X
- VLM
- MEANWELL
- OMNIDRIVE
- JUSTIN ELECTRONIC
- JUSTIN MAGNETIC
- LUTRON
- SWITCHEX+ R1

#### OMNIDRIVE® X DIMMABLE DRIVER

Versatile driver for most high-performance dimming on ELV, TRIAC, and 0-10V systems.



SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
DI-ODX-24V120W-J	Dimmable 8.66 x 3.7 x 1.57 in.	120-277VAC, 50/60Hz	24V / 120W	None
DI-ODX-24V200W-J	Dimmable 10.24 x 4.13 x 1.77 in.	120-277VAC, 50/60Hz	24V / 200W	None
DI-ODX-24V30W	Class 2, Dimmable 6.1 x 2.1 x 0.8 in.	120-277VAC, 50/60Hz	24V / 30W	None
DI-ODX-24V30W-J	Class 2, Dimmable 6.5 x 3.7 x 1.57 in.	120-277VAC, 50/60Hz	24V / 30W	None
DI-ODX-24V60W	Class 2, Dimmable 7 x 2.4 x 1 in.	120-277VAC, 50/60Hz	24V / 60W	None
DI-ODX-24V60W-J	Class 2, Dimmable 7.4 x 3.7 x 1.57 in.	120-277VAC, 50/60Hz	24V / 60W	None
DI-ODX-24V96W	Class 2, Dimmable 9 x 2.7 x 1.7 in.	120-277VAC, 50/60Hz	24V / 96W	None
DI-ODX-24V96W-J	Class 2, Dimmable 8.66 x 3.7 x 1.57 in.	120-277VAC, 50/60Hz	24V / 96W	None
DI-AWNAUX-ODX-24V96W-LPS3R	Class 2, Dimmable 10.79 x 7.34 x 2.36 in.	120-277V	24V / 96W	None
DI-AWNAUX-ODX-24V60W-LPS3R	Class 2, Dimmable 10.79 x 7.34 x 2.36 in.	120-277V	24V / 60W	None
DI-AWNAUX-ODX-24V30W-LPS3R	Class 2, Dimmable 10.79 x 7.34 x 2.36 in.	120-277V	24V / 30W	None
DI-AWN-ODX-24V96W-J	Class 2, Dimmable 8.66 x 3.7 x 1.57 in.	120-277V	24V / 96W	None
DI-AWN-ODX-24V60W-J	Class 2, Dimmable 7.4 x 3.7 x 1.57 in.	120-277V	24V / 60W	None
DI-AWN-ODX-24V30W-J	Class 2, Dimmable 6.5 x 3.7 x 1.57 in.	120-277V	24V / 30W	None

#### VLM SERIES CONSTANT VOLTAGE DRIVER

Compact driver for on/off, PWM dimming, and color-changing applications.



SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
VLM100W-24	Class 2 5.38 x 1 x 0.77 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM100W-24-LPM	Class 2 8.19 x 2.94 x 1.31 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM100W-24-LPS	Class 2 11.25 x 3.75 x 1.9 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM100W-24-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM200W-24-LPL	Class 2 13.5 x 4.5 x 2.38 in.	120 / 277VAC 47 - 63Hz	24V / 100W (X2)	None
VLM60W-24	Class 2 5.1 x 0.75 x 0.77 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None
VLM60W-24-LPM	Class 2 8.19 x 2.94 x 1.31 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None
VLM60W-24-LPS	Class 2 11.25 x 3.75 x 1.9 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None
VLM60W-24-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None

### RECOMMENDED POWER SUPPLIES

For additional Power Supply information, refer to individual Specification Sheet data at diodeled.com.

- OMNIDRIVE X
- VLM
- MEANWELL
- OMNIDRIVE
- JUSTIN ELECTRONIC
- JUSTIN MAGNETIC
- LUTRON
- SWITCHEX+ R1

### MEANWELL CONSTANT VOLTAGE DRIVER

Drivers for on/off or PWM dimming applications.

SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
DI-0954	Class 2 7.87 x 2.78 x 1.38 in.	90 ~ 295VAC / 47 ~ 63Hz	24V / 96W	None
DI-0954-LPL	Class 2 11.25 x 3.75 x 1.9 in.	90 ~ 295VAC / 47 ~ 63Hz	24V / 96W	None
DI-0954-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	90 ~ 295VAC / 47 ~ 63Hz	24V / 96W	None
DI-0970	Class 2 5.83 x 1.57 x 1.18 in.	90 ~ 264VAC / 47 ~ 63Hz	24V / 35W	None
DI-0970-LPS	Class 2 11.25 x 3.75 x 1.9 in.	90 ~ 264VAC / 47 ~ 63Hz	24V / 35W	None
DI-0970-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	90 ~ 264VAC / 47 ~ 63Hz	24V / 35W	None
DI-CV-24V150W	Not Class 2 7.52 x 2.5 x 1.48 in.	90 ~ 132VAC / 47 ~ 63Hz	24V / 150W	None
DI-CV-24V200W	Not Class 2 8.46 x 4.53 x 1.18 in.	88 ~ 264VAC, 47 ~ 60Hz	24V / 200W	None
DI-CV-24V330W	Not Class 2 8.5 x 4.13 x 1.61 in.	85 ~ 264VAC / 47 ~ 63Hz	24V / 330W	None
DI-CV-24V60W-OWA	Class 2 5.1 x 2.1 x 1.4 in.	90 ~ 264VAC 127 ~ 370VAC	24V / 60W	None
DI-CV-24V90W-OWA	Class 2 6.75 x 2.5 x 1.5 in.	90 ~ 264VAC 127 ~ 370VAC	24V / 90W	None
DI-CV-MW24V60W-277	Class 2 5.9 x 2.1 x 1.4 in.	120 ~ 277VAC 50/60Hz	24V / 60W	None
DI-CV-MW24V60W-277-LPS	Class 2 11.25 x 3.75 x 1.9 in.	120 ~ 277VAC 50/60Hz	24V / 60W	None
DI-CV-MW24V60W-277-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 ~ 277VAC 50/60Hz	24V / 60W	None
DI-CV-MW24V90W-277	Class 2 6.8 x 2.5 x 1.5 in.	120 ~ 277VAC 50/60Hz	24V / 90W	None
DI-CV-MW24V90W-277-LPL	Class 2 13.5 x 4.5 x 2.38 in.	120 ~ 277VAC 50/60Hz	24V / 90W	None
DI-CV-MW24V90W-277-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 ~ 277VAC 50/60Hz	24V / 90W	None
DI-CV-24V150W-277	Not Class 2 9 x 2.67 x 1.5 in.	120 ~ 277VAC 50/60Hz	24V / 150W / 6.3A	None
DI-CV-24V240W-277	Not Class 2 9.61 x 2.67 x 1.53 in.	120 ~ 277VAC 50/60Hz	24V / 240W / 10A	None
DI-CV-24V320W-277	Not Class 2 9.92 x 3.54 x 1.72 in.	120 ~ 277VAC 50/60Hz	24V / 320W / 13.34A	None
DI-CV-24V480W-277	Not Class 2 10.31 x 4.92 x 1.72 in.	120 ~ 277VAC 50/60Hz	24V / 480W / 20A	None
DI-CV-24V600W-277	Not Class 2 11.02 x 5.67 x 1.9 in.	120 ~ 277VAC 50/60Hz	24V / 600W / 25A	None

### OMNIDRIVE® ELECTRONIC DIMMABLE DRIVER

Our classic electronic dimmable (ELV) driver. Superior dimming and wide compatibility with popular dimmers.

SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
DI-TD-24V-10W	Class 2, Dimmable 5.7 x 2.1 x 0.75 in.	90~135VAC at ~50/60Hz	24V / 10W	Load at least 60% labeled load
DI-TD-24V-10W-LPS	Class 2, Dimmable 11.25 x 3.75 x 1.9 in.	90~135VAC at ~50/60Hz	24V / 10W	Load at least 60% labeled load
DI-TD-24V-10W-LPS3R	Class 2, Dimmable 10.79 x 7.34 x 2.36 in.	90~135VAC at ~50/60Hz	24V / 10W	Load at least 60% labeled load
DI-TD-24V-120W	Dimmable x x in.	90~135VAC at ~50/60Hz	24V / 120W	Load at least 60% labeled load
DI-TD-24V-20W	Class 2, Dimmable 5.7 x 2.1 x 0.75 in.	90~135VAC at ~50/60Hz	24V / 20W	Load at least 60% labeled load
DI-TD-24V-20W-LPS	Class 2, Dimmable 11.25 x 3.75 x 1.9 in.	90~135VAC at ~50/60Hz	24V / 20W	Load at least 60% labeled load
DI-TD-24V-20W-LPS3R	Class 2, Dimmable 10.79 x 7.34 x 2.36 in.	90~135VAC at ~50/60Hz	24V / 20W	Load at least 60% labeled load
DI-TD-24V-30W	Class 2, Dimmable 7 x 2.3 x 1.35 in.	90~135VAC at ~50/60Hz	24V / 30W	Load at least 60% labeled load
DI-TD-24V-30W-LPS	Class 2, Dimmable 11.25 x 3.75 x 1.9 in.	90~135VAC at ~50/60Hz	24V / 30W	Load at least 60% labeled load
DI-TD-24V-30W-LPS3R	Class 2, Dimmable 10.79 x 7.34 x 2.36 in.	90~135VAC at ~50/60Hz	24V / 30W	Load at least 60% labeled load
DI-TD-24V-45W	Class 2, Dimmable 7 x 2.3 x 1.35 in.	90~135VAC at ~50/60Hz	24V / 45W	Load at least 60% labeled load
DI-TD-24V-45W-LPL	Class 2, Dimmable 13.5 x 4.5 x 2.38 in.	90~135VAC at ~50/60Hz	24V / 45W	Load at least 60% labeled load
DI-TD-24V-45W-LPS3R	Class 2, Dimmable 10.79 x 7.34 x 2.36 in.	90~135VAC at ~50/60Hz	24V / 45W	Load at least 60% labeled load
DI-TD-24V-60W	Class 2 7.9 x 2.7 x 1.8 in.	90 ~ 135VAC 50/60Hz	24V / 60W	Load at least 60% labeled load
DI-TD-24V-60W-LPL	Class 2 13.5 x 4.5 x 2.38 in.	90 ~ 135VAC 50/60Hz	24V / 60W	Load at least 60% labeled load
DI-TD-24V-60W-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	90 ~ 135VAC 50/60Hz	24V / 60W	Load at least 60% labeled load
DI-TD-24V-80W	Class 2 7.9 x 2.7 x 1.8 in.	90 ~ 135VAC 50/60Hz	24V / 80W	Load at least 60% labeled load
DI-TD-24V-80W-LPL	Class 2 13.5 x 4.5 x 2.38 in.	90 ~ 135VAC 50/60Hz	24V / 80W	Load at least 60% labeled load
DI-TD-24V-80W-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	90 ~ 135VAC 50/60Hz	24V / 80W	Load at least 60% labeled load
DI-TD-24V-96W	Class 2 7.9 x 2.7 x 1.8 in.	90 ~ 135VAC 50/60Hz	24V / 96W	Load at least 60% labeled load
DI-TD-24V-96W-LPL	Class 2 13.5 x 4.5 x 2.38 in.	90 ~ 135VAC 50/60Hz	24V / 96W	Load at least 60% labeled load
DI-TD-24V-96W-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	90 ~ 135VAC 50/60Hz	24V / 96W	Load at least 60% labeled load

## RECOMMENDED POWER SUPPLIES

For additional Power Supply information, refer to individual Specification Sheet data at [dodeled.com](http://dodeled.com).

- OMNIDRIVE X
- VLM
- MEANWELL
- OMNIDRIVE
- JUSTIN ELECTRONIC
- JUSTIN MAGNETIC
- LUTRON
- SWITCHEX+ R1

### JUSTIN INC. ELECTRONIC DRIVER

Compatible with a wide range of dimmers and control systems including Lutron Homeworks and its derivatives.

SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
481-24SSD	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 2A, 48W	See Driver Specification Sheet
482-24SSD	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 2A, 48W	See Driver Specification Sheet
961-24SSD	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 4A, 96W	See Driver Specification Sheet
962-24SSD	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 4A, 96W	See Driver Specification Sheet

### JUSTIN INC. MAGNETIC DRIVER

Compatible with a wide range of dimmers and control systems including Lutron Homeworks and its derivatives.

SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
481-24DCR	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 2A, 48W	See Driver Specification Sheet
482-24DCR-240	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 2A, 48W	See Driver Specification Sheet
483-24DCR-277	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 2A, 48W	See Driver Specification Sheet
961-24DCR	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 4A, 96W	See Driver Specification Sheet
962-24DCR-240	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 4A, 96W	See Driver Specification Sheet
963-24DCR-277	Class 2 11.25 x 3.37 x 3.25 in.	120VAC / 240VAC / 277VAC (50/60Hz)	24V / 4A, 96W	See Driver Specification Sheet

### RECOMMENDED CONTROLLERS

For additional Controller information, refer to individual Specification Sheet data at [diodeled.com](http://diodeled.com).

#### CASAMBI® CONTROLLERS

The CASAMBI controllers will remotely control your lighting through the app - downloadable for IOS & Android.

SKU	DESCRIPTION
CBU-A2D	CASAMBI A2D 2 Channel 0-10V/DALI Controller
CBU-ASR	CASAMBI ASR 0-10V Controller
CBU-PWM4	CASAMBI PWM4 Single Color Dimming Controller
DI-CBU-PWM5-PRO	Casambi CBU-PWM5-Pro RGB/W/WW Applications, 5 x PWM for constant voltage lights, 4 amps/CH max

#### TOUCHDIAL™ CONTROL SYSTEMS

The TOUCHDIAL™ zone control system controls single color dimming, tunable white, and color changing LED lighting via mobile device and additional TOUCHDIAL controls.

SKU	DESCRIPTION
DI-RF-REC-CV-A	TOUCHDIAL Color Control System - WiFi Receiver
DI-RF-REC-CV-SC	TOUCHDIAL Mini Receiver - Single Channel and Zone
DI-RF-REM-DIM-1	TOUCHDIAL Mini Remote - Single Zone
DI-RF-REM-DIM-5	TOUCHDIAL Remote Dimmer 5-Zone Dimmer Control
DI-RF-REM-RGBW-1	TOUCHDIAL Mini Remote RGB(W) - Single Zone
DI-RF-REM-RGBW-4	TOUCHDIAL Color Control System - RGB/RGBW 4-Zone Remote Controller
DI-RF-REM-TW-4	TOUCHDIAL Color Control System - Tunable White 4-Zone Remote Controller
DI-RF-WMT-DIM	TOUCHDIAL Wall Dimmer - Single Zone
DI-RF-WMT-RGBW	TOUCHDIAL RGB(W) Wall Control - Single Zone
DI-RF-WPD-DIM-1	TOUCHDIAL Paddle Dimmer - Single Zone
DI-RF-WPD-DIM-2	TOUCHDIAL Paddle Dimmer - Two Zone
DI-WIFI-RF-TRMS	TOUCHDIAL Color Control System - WiFi Hub
DI-RF-REM-TW3-4	TOUCHDIAL Color Control System, 3-Anchor Tunable White 4-Zone Remote Controller

## CERTIFICATIONS

### Safety

- UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750. UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.
- CE & EMC Compliant: Verification No. GZEM141200683705V
- Approved for storage areas of clothes closets per NEC 410.16.A.1,3 and 410.16.C.1,3,5

### Environment

- Ambient Temperature: -4 ~ 122°F (-20 ~ 50°C)
- Operating Temperature: -4 ~ 176°F (-20 ~ 80°C)
- RoHS Compliant: Verification No. CANEC1610091501

### Performance

- Can be used to comply with TITL 24 Part 6 High Efficacy Lighting LED requirements - JA8-2016-2022-E
- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

### Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
8. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
9. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
10. Do not modify product beyond instructions or warranty will be void.
11. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
12. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
13. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

## LIMITED WARRANTY

- 12 Year Limited Warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at [www.dioleed.com/limited-warranty/](http://www.dioleed.com/limited-warranty/) within the Policies section. For warranty related questions please contact product support.

### Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.

- Lumen value measured in accordance to IES LM-79-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.